

D220W / D220CW



D220W

Double Check Valves

PN16

Features & Benefits


- Double check valves are used to prevent the risk of backflow and back siphonage contamination in domestic dwellings, public and commercial buildings
- WRAS Approved for use with wholesome (potable) water to 85°C (85°C for threaded and 60°C for Compression)
- Compression version supplied with ends complying with BS EN 1254-2 for use with BS EN 1057 R250 (half hard) copper tube or female taper threads complying with BS EN 10226-2
- Shell pressure rating for D220W and D220CW is PN16 with a maximum inlet/working pressure of 16 bar
- Compliant with BS EN 13959 'Anti-pollution check valves' family E type D

Materials


PART	MATERIAL	SPECIFICATION
Body	DZR Brass	BS EN 12165 CW602N
Cartridge	Acetal	-
Vent Plug (threaded)	Brass	BS EN 12165 CW614N / 617N
Vent Plug (compression)	Nylon	-
'O' ring	NBR / EPDM	-
Retaining Clip	Stainless Steel	AISI 304
Compression Nut	Brass	BS EN 12165 CW602N
Compression Olive	Cartridge Brass	H62
Plating (compression)	Nickel Plated	-
Plating (Threaded)	Unplated	-



Dimensional Drawing

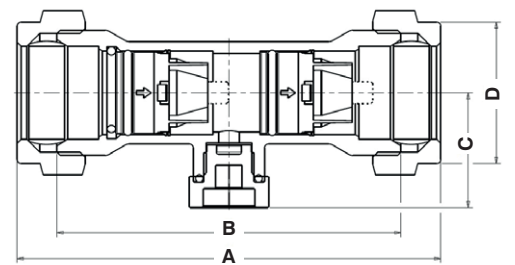

Compression

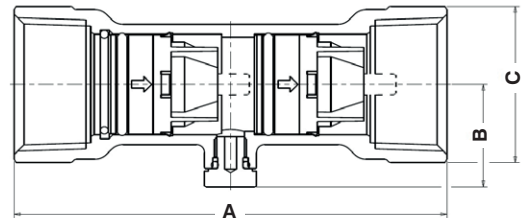

Threaded

Dimensions & Weights

Compression - D220CW

SIZE (mm)	A (mm)	B (mm)	C (mm)	D (mm)	WEIGHT (kg)
15	82.1	63.4	25.2	29.4	0.17
22	101.3	82.2	27.5	39.3	0.29
28	115.2	94.8	30	45.6	0.41

Threaded - D220W

SIZE (inch)	A (mm)	B (mm)	C (mm)	WEIGHT (kg)
1/2	75.7	20.2	25.5	0.13
3/4	94.8	22.3	32	0.21
1	108	25.6	39	0.33
1 1/4	118	29.7	49.5	0.49
1 1/2	137	36.8	57	0.79
2	181	37.1	70	1.41

Pressure/Temperature Ratings

	COMPRESSION	THREADED
TEMPERATURE (°C)	-10 to 60	-10 to 85
SHELL PRESSURE (BAR)	16	16

SHELL PRESSURE RATING: PN16

MAX INLET/WORKING PRESSURE: 16 bar

WRAS APPROVED: 16 bar

MIN OPENING PRESSURE: 0.2 bar

END CONNECTIONS: Compression to BS EN 1252-2 and taper female threaded to BS EN 10226-2

APPLICATION: Water

TEMPERATURE RATING: 85°C maximum - WRAS Approved to 85°C

PED: This valve is suitable for use on group 2 liquids only as defined by the Pressure Equipment Directive 2014/68/EU

Every effort has been made to ensure that the information contained in this publication is accurate at the time of publishing. Crane Ltd assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

Valid as of 01/02/21